



Main Features:

- Frequency Range: 2 to 8 GHz.
- Typical values: P1dB 37 dBm, Gain 43 dB
- RF connectors (I/O): SMA
- Solder filtered pins for DC connection
- Several mounting options
- Gold plated compact aluminum housing
- Hi-reliability and dedicated screening/
environmental tests available under request

ERZ-HPA-0200-0800-36

The ERZ-HPA-0200-0800-36 is a pulsed High Power Amplifier providing an output power of 37 dBm with a 10% duty cycle a gain of 43 dB. The compact size and modularity makes it ideal for a wide range of applications.

Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace / Military

Performance

Parameter	Value			Units
	Min	Typ	Max	
Frequency	2	-	8	GHz
Output Power (P1dB) (10% duty cycle)	31.5	37	40	dBm
Gain	38	43	48	dB
Noise Figure	-	-	-	dB
VSWR input	1.4:1	1.5:1	1.7:1	-
VSWR output	1.1:1	1.5:1	2.0:1	-
DC Voltage	12	15	18	V
Power Consumption (@P1dB)	-	37.5	-	W
Connectors	SMA Female IN/OUT			-

Specifications at a case temperature of 25°C

Output Power at 1 dB Compression

Figure 1 shows output power at 1dB compression measurement as a function of frequency at room temperature (25°C).

RF input signal characteristics:

- Pulse period: 100us
- Pulse width: 10 us

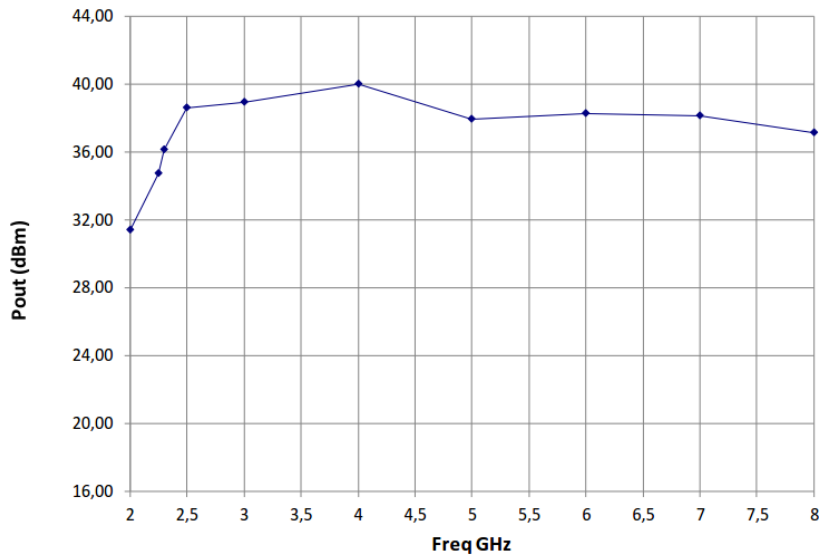


Figure 1: ERZ-HPA-0200-0800-36 P1dB over frequency

Figure 2 shows output power (P1dB) as a function of Input Power (Pin) at room temperature (25°C).

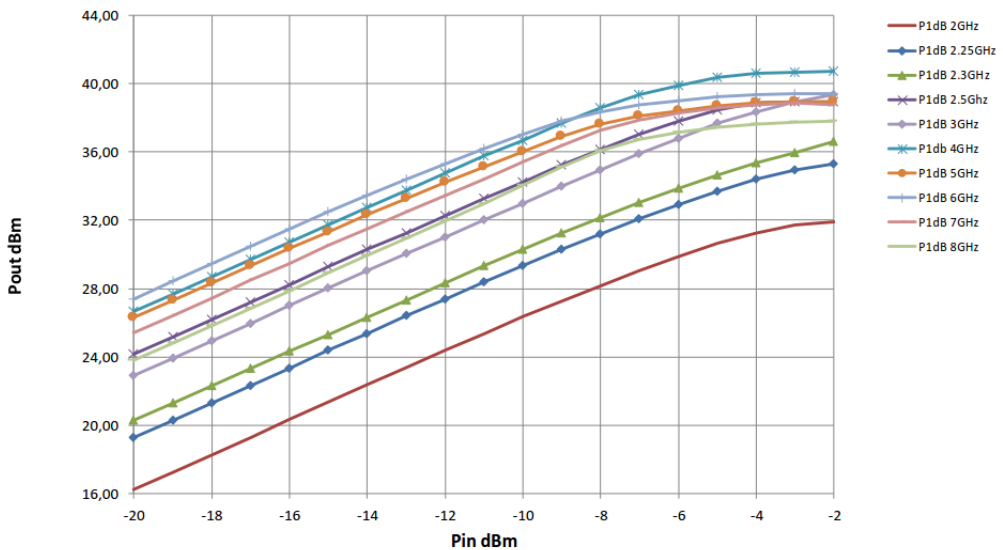


Figure 2: ERZ-HPA-0200-0800-36 P1dB Vs Pin

Small Signal Gain

Figure 3 shows the small signal gain measurement as a function of frequency at room temperature (25°C).

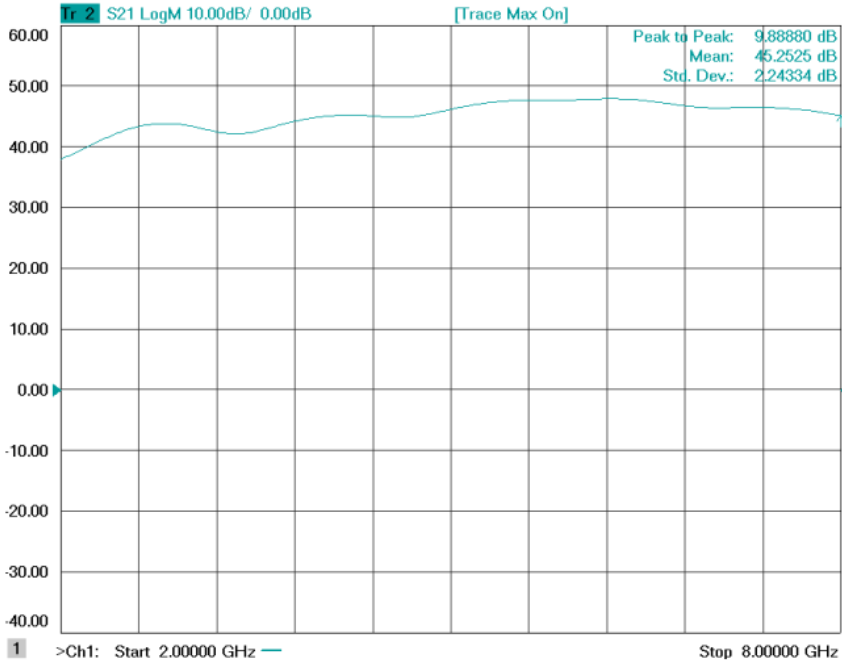


Figure 3: ERZ-HPA-0200-0800-36 Small Signal Gain

Input and Output Matching

Figure 4 and Figure 5 show input (S11) and output (S22) VSWR as a function of frequency at room temperature (25°C).

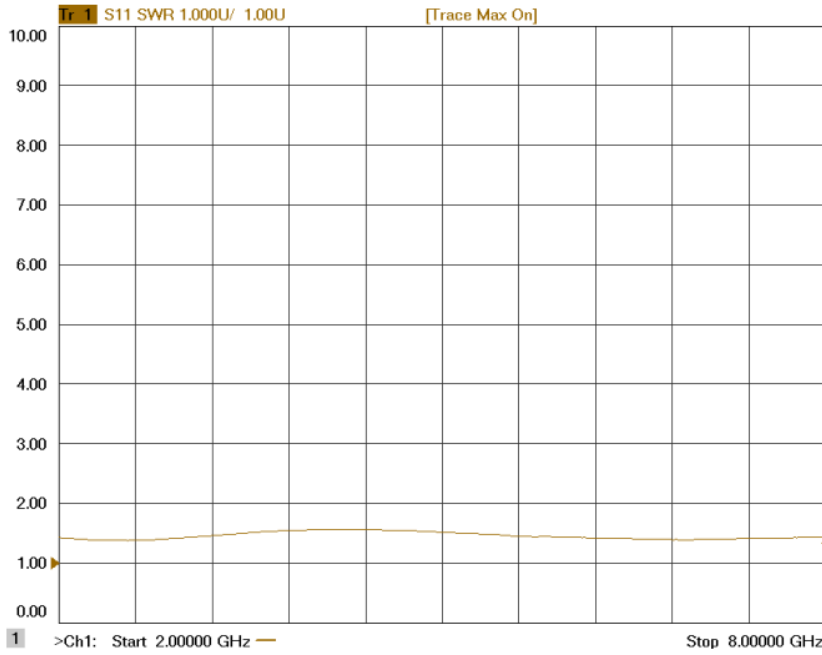


Figure 4: ERZ-HPA-0200-0800-36 Input Matching

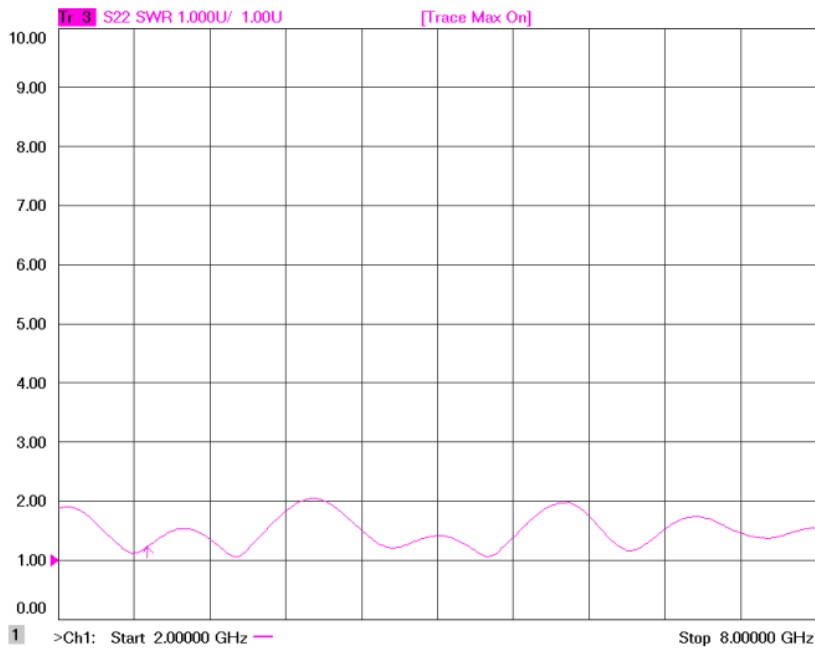


Figure 5: ERZ-HPA-0200-0800-36 Output Matching

Measurements Conditions

All measurements provided in this report were performed at the following conditions:


Condition	Value
Temperature	25°C ± 1°C
Humidity	44% ± 10%
DUT Warm up time	30 min
Test equipment warm up time	1 hour

Absolute Maximum Ratings

Condition	Value
DC Voltage	+18 VDC
Maximum Input Power (Pulsed RF signal) RF input characteristics: - Pulse width: 10 us	0 dBm
Operation temperatura (at case)	-35°C to 70°C
Storage temperature	-45°C to 85°C

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

Mechanics and Housing

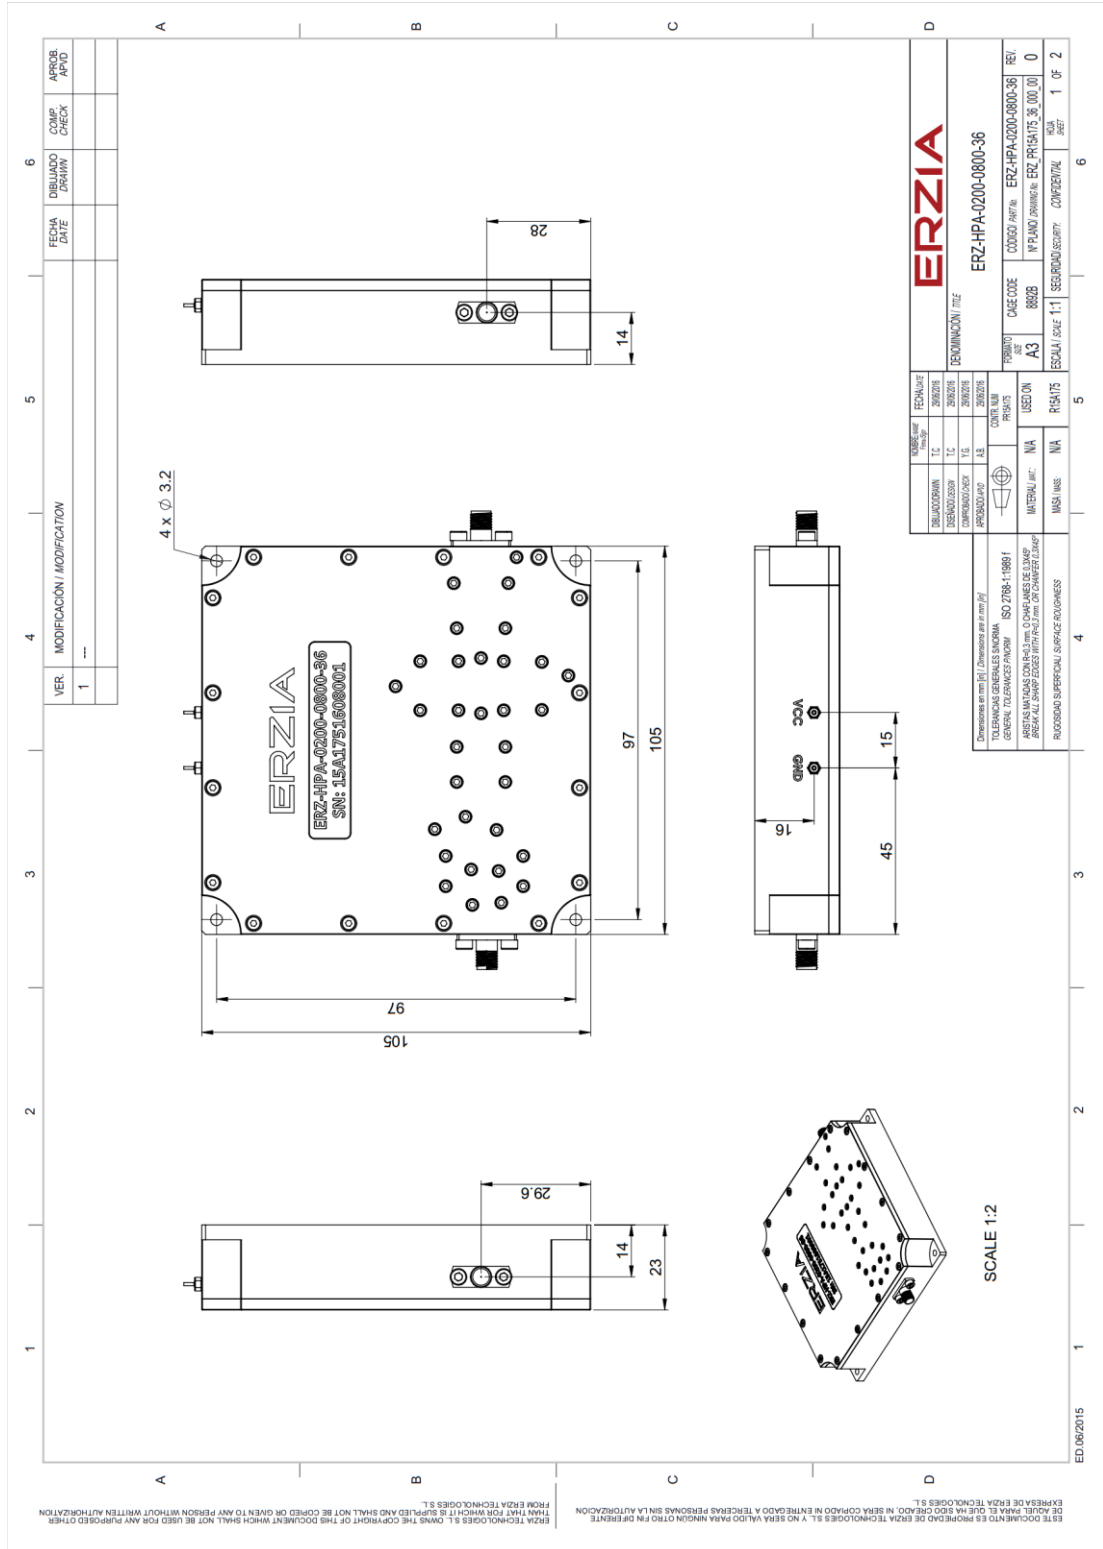

Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

Space / Military Usage

Most of ERZIA's products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, military or specific hi-reliability usage.

Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

Model Number Codification

MODEL NUMBER



ERZIA

20160809_rev1.0

Copyright © 2016 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 29 13 42

sales.rf@erzia.com

www.erzia.com