

SDD3000-A01

Quartz MEMS Digital Single Axis Rate Sensor

emcore®



DATASHEET | JUNE 2023

Transforming Navigation



Applications

- Targeting & Pointing Systems
- Gimbal & Platform Stabilization
- Tactical Land Navigation
- Gun & Turret Stabilization
- Marine Stabilization
- Unmanned Aerial Vehicles (UAVs)
- Industrial Robotics

Key Performance Features

- Bias in-run Stability <math><0.5^\circ/\text{hr}</math>
- $0.01^\circ/\sqrt{\text{hr}}$ Exceptionally Low Noise (ARW)
- Compact <math><8.0\text{ in.}3</math> Size
- Robust Shock & Vibration Tolerance
 - 40g Shock Operating / 150g Shock Survival
- RS-232 or RS-422 Digital Output
- Superior Quality & Reliability

Ideal for High-Precision Applications

The SDD3000-A01 meets state-of-the-art systems requirements for precision accuracy, low noise angular rate sensing with a digital RS-232 / RS-422 output. The SDD3000-A01 is an enhanced alternative to fiber optic and spinning mass gyro technology or SDI's popular, highly-reliable QRS11 and QRS116 units. The SDD3000-A01 provides a temperature-compensated output with unprecedented bias stability and durability.



Ideal for rugged ground vehicle and aerospace applications, the SDD3000-A01 is an extremely versatile quartz gyro that requires very little configuration and integration time into new or retrofit applications. Using the latest-best generation version of EMCORE's unique quartz micro-machined sensing element, the SDD3000-A01 delivers excellent signal to noise ratio and vibration performance characteristics in a small, lightweight package. With no moving parts and no scheduled maintenance, the SDD3000-A01 provides reliable service and low total cost of ownership.

Performance Highlights

Parameter	SDD3000-A01
Standard Range Full Scale	min $\pm 100^\circ/\text{sec}$
Bias Over Temperature 1σ	$1.0^\circ/\text{hr}$
Bias Over Temperature (max)	$3.0^\circ/\text{hr}$
Bias In-Run Stability (Constant Temperature) 1σ	$0.5^\circ/\text{hr}$
Scale Factor Error Over Temperature Stability 1σ	200 ppm



SDD3000-A01

Quartz MEMS Digital Single Axis Rate Sensor


Transforming Navigation

Performance Specifications

Parameter	SDD3000-A01
System Performance	
Start-Up Time	max ≤ 1.5 sec
I/O (Dual Protocol, User Selectable)	RS-232 or RS-422, 115.2 KBaud
Gyro Performance	
Standard Range Full Scale (min)	±100°/sec
Bias Over Temperature 1σ	1.0°/hr
Bias Over Temperature (max)	3.0°/hr
Bias In-Run Stability (Constant Temperature) 1σ	0.5°/hr
Scale Factor Error Over Temperature Stability 1σ	200 ppm
Rate Output Noise (ARW) max	0.01 °/√hr
Non-Linearity (% Full Range) max	0.05%
System Physical & Environmental	
Input Voltage	+11 to +16 Vdc 1.5A (0.5msec) inrush/start-up surge
Power	<2.25W (230 mA @ 12V continuous) 1.5A (0.5msec) inrush/start-up surge
Size Dimensions	3.1" x 3.25" x 0.96" (78 x83 x 25 mm)
Weight	<0.5 lbs. (<227 grams)
Operating Temperature Range*	-2°C to +60°C
Vibration Operating (10 – 1100 Hz, flat profile)	5.2 g rms. performance
Shock Operating	40 g, 30 milliseconds, ½ sine pulse
Shock Survival (20g 11ms)	150 g, 11 milliseconds, ½ sine pulse
MTBF	>25,000 hrs

* Limited temperature range.

SDD3000 Allan Variance Plot

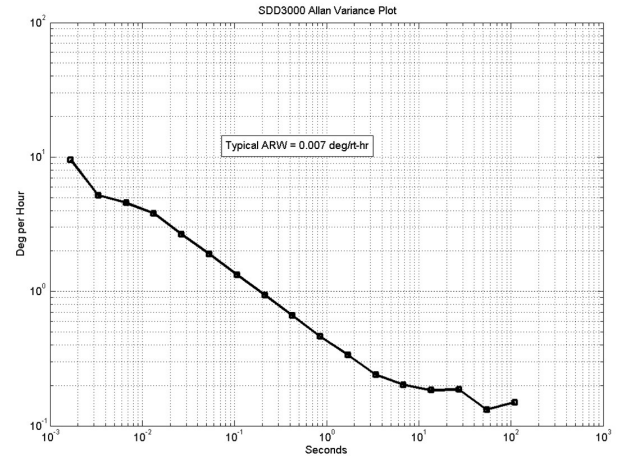

Dimensions/Scale



EMCORE P/N 966238 Rev F

For More Information

+1 866.234.4976 | navigation-sales@emcore.com | emcore.com/nav

EMCORE Corporation


2015 Chestnut Street
Alhambra, CA 91803 USA

P +1 626.293.3700

F +1 626.293.3429

emcore®

ISO9001
CERTIFIED



© 2023 EMCORE Corporation. All rights reserved.

Information contained herein is deemed to be reliable and accurate as of issue date. EMCORE reserves the right to change the design or specifications of our products at any time without notice. EMCORE and Systron Donner Inertial are registered trademarks of EMCORE Corporation in the U.S. and other countries.

MADE IN
USA

Released 06.06.2023