

DATASHEET | APRIL 2022

Transforming Navigation



Ideal for Precision Industrial Applications

The QRS14 is a compact, rugged, solid-state inertial sensor used to measure angular rotation rates. It features a monolithic quartz sensing element, internal power regulation and DC input/high-level DC output operation. Two versions are available. The +12 Vdc version features a high-level +1.0 to +4.0 Vdc output, and operation from standard battery power. The plus and minus 15 Vdc version provides a high-level bipolar output of ± 5 Vdc, and is designed for use with conventional double-sided power supplies.



Applications

- Platform Stabilization
- Short Term Navigation
- GPS Augmentation
- Camera Stabilization
- Instrumentation
- Ride Control Stabilization
- Wind Turbine Control

Key Performance Features

- Solid State
- Compact, Lightweight Design
- Wide Temperature Range
- DC Input/High-Level DC Output
- Internal Power Regulation
- High Reliability
- Shock Resistant

Performance Highlights

Parameter	QRS14-0XXXX-102**	QRS14-0XXXX-103**
Standard Ranges	$\pm 50, 100, 200, 500^\circ/\text{sec.}$	
Full Scale Output (Nominal)	+1.0 Vdc (-FS) to +4.0 Vdc (+FS)	± 5 Vdc
Scale Factor Calibration (at 22°C Typical)	$\pm 2\%$ of value	
Scale Factor Over Temperature (Dev. from 22°C Typical)	$\leq 0.06\%/^\circ\text{C}$	
Bias Calibration (at 22°C Typical)	$+2.5 \pm 0.045$ Vdc	0.0 ± 0.075 Vdc
Bias Variation over Temperature (Dev. from 22°C)	$< 3.0^\circ/\text{sec}$	
Short Term Bias Stability (100 sec at const. temp)	$< 0.05^\circ/\text{sec}$, typical	
Long Term Bias Stability (1 year)	$\leq 1.0^\circ/\text{sec.}$	
Bandwidth (-90° Phase Shift)	> 50 Hz	
Output Noise (DC to 100 Hz)	$\leq 0.05^\circ/\text{sec.}/\sqrt{\text{Hz}}^*$	$\leq 0.02^\circ/\text{sec.}/\sqrt{\text{Hz}}^*$

* Values indicated are for $\pm 100^\circ/\text{sec.}$ range

**"XXXX" designates \pm range



QRS14

Quartz MEMS Angular Rate Sensor

Transforming Navigation

Performance Specifications

Parameter	QRS14-0XXXX-102**	QRS14-0XXXX-103**
Power Requirements		
Input Voltage	+9 to +18 Vdc	+ and - 9 to 18 Vdc
Input Current	<20 mA	<25 mA (each supply)
Performance		
Standard Ranges	±50, 100, 200, 500°/sec.	
Full Scale Output (Nominal)	+1.0 Vdc (-FS) to +4.0 Vdc (+FS)	±5 Vdc
Scale Factor Calibration (at 22°C Typical)	±2% of value	
Scale Factor Over Temperature (Dev. from 22°C Typical)	≤0.06%/°C	
Bias Calibration (at 22°C Typical)	+2.5 ±0.045 Vdc	0.0±0.075 Vdc
Bias Variation over Temperature (Dev. from 22°C)	<3.0°/sec	
Short Term Bias Stability (100 sec at const. temp)	<0.05°/sec, typical	
Long Term Bias Stability (1 year)	≤1.0°/sec.	
G Sensitivity (Typical)	≤0.06°/sec/g	
Start-Up Time (Typical)	<2.0 sec	
Bandwidth (-90° Phase Shift)	>50 Hz	
Non-Linearity (Typical) % Full Range	≤0.05% of F.R.	
Threshold/Resolution	≤0.004°/sec.*	
Output Noise (DC to 100 Hz)	≤0.05°/sec./√Hz*	≤0.02°/sec./√Hz*
Environments		
Operating Temperature	-40°C to +85°C	
Storage Temperature	-55°C to +100°C	
Vibration Operating***	5 grms 20 Hz to 2 kHz random	
Vibration Survival***	10 grms 20 Hz to 2 kHz random 5 minutes/axis	
Shock	200g, any axis	
Weight	≤50 grams	

* Values indicated are for ±100°/sec. range


***"XXX" designates ± range

*** Please see user's guide for more information regarding vibration tolerance and sensitivity.

Notes

- QRS14 is supplied with a mating connector (Molex P/N 5264-7 or Equiv.).
- Angular rate applied as shown will produce a positive output.
- Unit of measure is in inches/[mm].
- Built-in-test activated by grounding Pin 7 causes an increase in rate output (Pin 5) of 0.5 Vdc nominal.
- Built-in-test activated by grounding Pin 7 causes an increase in rate output (Pin 5) of 1.0 Vdc nominal.

Dimensions/Scale

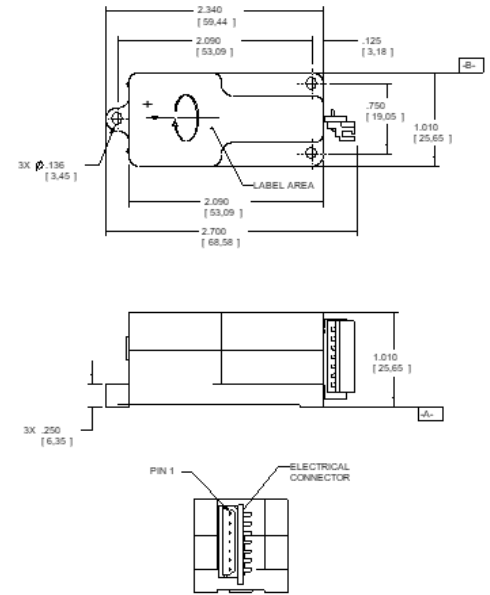

QRS14 -00XXX-102 PIN ASSIGNMENT

- Power and Signal Ground
- +Vdc Input
- No connection, Leave Open
- No connection, Leave Open
- Rate Output
- No Connection, Leave Open
- Built-in-test (Note 4)

QRS14 -00XXX-103 PIN ASSIGNMENT

- Vdc Input
- +Vdc Input
- Power Ground
- Signal Ground
- Rate Output
- No Connection, Leave Open
- Built-in-test (Note 5)

For More Information

+1 866.234.4976 | navigation-sales@emcore.com | emcore.com/nav

EMCORE Corporation

2015 Chestnut Street
Alhambra, CA 91803 USA

P +1 626.293.3700

F +1 626.293.3429

emcore®

ISO9001
CERTIFIED



© 2022 EMCORE Corporation. All rights reserved.

Information contained herein is deemed to be reliable and accurate as of issue date. EMCORE reserves the right to change the design or specifications of our products at any time without notice. EMCORE and Systron Donner Inertial are registered trademarks of EMCORE Corporation in the U.S. and other countries.

MADE IN
USA
Released 07.05.2022